

FOR VERNON COUNTY, WISCONSIN


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter AE-7.08, U.S. Public Land Survey Monument Record (3)(a)(b)(c)(d)(e)(f)(g)(h)(i). Use additional sheets if necessary.

(a) Sections 10

Township(s) 14 North, Range(s) 07 West.

Vernon County Coordinates: N 199786.377

E 617280.153

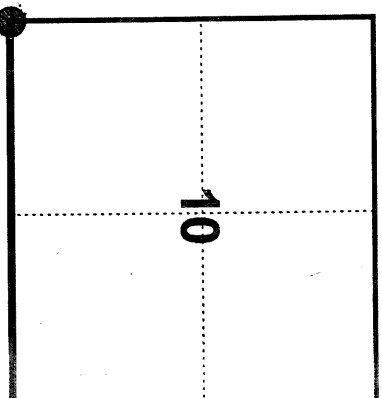


(b)(f)(h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats records, other monuments) used as a basis for accepting. If not accepted or nothing was found, state evidence used as basis for establishing location and what was set. If re-established through lost corner proportionate methods, indicate all monuments, distances and directions used.

1846-1847 Alfred L. Brown established the original corner location 79.50 chains East of the Southwest corner of Section 9.

December 4, 1998 - I found an United States Army Corp of Engineers monument and accepted it as the true location of the corner as it fits occupation to the north, south, and west. I set witnesses as shown.

(c)(d)(e) Plan view of corner with ties to at least four (4) witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate ties to disputed corner.

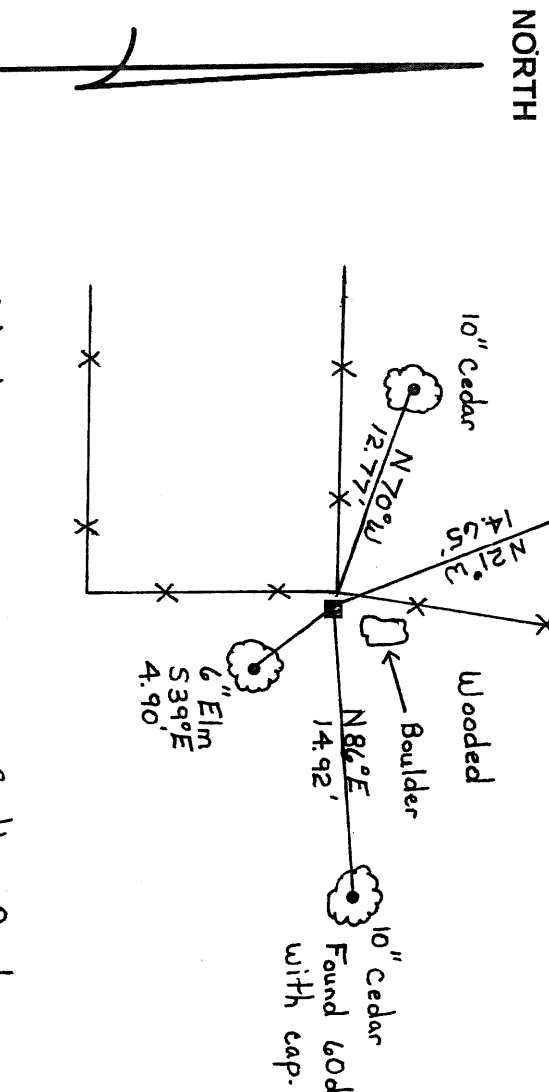


= Placed Vernon County Monument

- = Placed 60d spike
- = Found Corp. of Engineers Monument

(I) Certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land survey Monument Record is correct and complete to the best of my knowledge and belief.

Signature Carl M. Sandsnes _____ Date December 31, 1998.

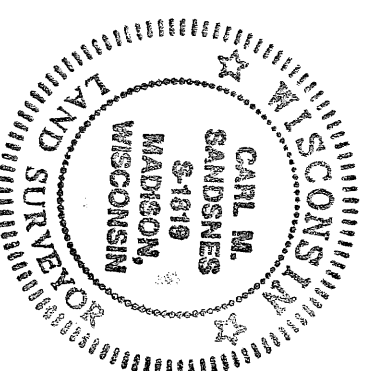

Filed for record in Vernon County Surveyor's Office on _____

INDEX NO. _____